



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Lindab circular ventilation duct

EPD Registration number: EPD HUB, HUB-0917

Version: 1.0

Publication date: 5 December 2023

Valid until: 5 December 2028

Revision date: 5 December 2023

Lindab Belgium



Table of Contents

General information	3
Manufacturer	3
EPS standards, scope and verification	3
Products	4
Environmental data summary	4
Manufacturer	5
About Lindab	5
For a better climate	5
Our vision	5
The importance of ventilation	5
Sustainability plan	6
Steel – a sustainable material	6
Product	7
Product description	8
Product raw material main composition VP	8
Biogenic carbon content VP	9
Functional unit and service life	9
Substances, reach – very high concern	9
Product life-cycle	8
System boundary	8
Manufacturing and packaging	8
Transport and installation	9
Product use and maintenance	9
Product end life	9
Manufacturing process	10
Life-cycle assessment	11
Cut-off criteria	11
Allocation, estimated and assumptions	11
Averages and variability	11
LCA software and bibliography	11
Environmental Impact Data	12
Core environmental impact indicators	12
Additional (optional) core environmental impact indicators	12
Use of natural resources	13
End of life - waste	13
End of life – output flows	13
Environmental impacts	14
Verification statement	15
Verification process for this EPD	15
Third-party verification statement	15
Annex: Product article information	16

GENERAL INFORMATION

MANUFACTURER

Manufacturer	Lindab Belgium
Address	Zeeschipstraat 149, 9000 Gent, Belgium
Contact details	sales@lindab.be
Website	www.lindab.be

EPD STANDARDS, SCOPE AND VERIFICATION

Program operator	EPD Hub, hub@epdhub.com
Reference standard	EN 15804+A2:2019 and ISO 14025
PCR	EPD Hub Core PCR version 1.0, 1 Feb 2022
Sector	Construction product
Category of EPD	Sister EPD to HUB-0506
Scope of the EPD	Cradle to gate with options, A4-A5, and modules C1-C4, D
EPD author	Alice Andersen
EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☐ Internal certification ☒ External verification
EPD verifier	Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.



PRODUCT

Product name	Circular ventilation duct Lindab Safe & Safe Click
Additional labels	-
Product reference	SR Spiral Duct
Place of production	Gent, Belgium
Period for data	Calendar year 2022
Averaging in EPD	Not applicable
Variation in GWP-fossil for A1-A3	-

More information on page 7.

ENVIRONMENTAL DATA SUMMARY

Declared unit	1 kg of circular ventilation duct
Declared unit mass	1 kg
GWP-fossil, A1-A3 (kgCO ₂ e)	2.80
GWP-total, A1-A3 (kgCO ₂ e)	2.79
Secondary material, inputs (%)	5.05
Secondary material, outputs (%)	95.0
Total energy use, A1-A3 (kWh)	9.26
Total water use, A1-A3 (m ³ e)	0.0036

MANUFACTURER

ABOUT LINDAB

Lindab is a leading ventilation company in Europe, offering solutions for energy-efficient ventilation and a healthy indoor climate. The products are characterised by high quality, ease of installation and environmental thinking. In northern Europe, Lindab also offers an extensive range of roof, wall and rainwater systems.

FOR A BETTER CLIMATE

We want to create a better climate. Most of us spend the majority of our time indoors. The air we breathe, in our homes, at our workplaces and at school, affects our well-being. Since air is not visible, we do not always think about it. However, the indoor climate is crucial for how we feel, for our energy levels, and whether we stay healthy. Lindab wants to contribute to the architecture and indoor climate of tomorrow. We also want a better climate for our planet. That is why we develop energy-efficient solutions for healthy indoor environments



OUR VISION

We want to be the leading player in the area in which we are strongest – ventilation in Europe. We focus on air distribution and air diffusion. Since we offer high-quality products, we focus on Europe where demand for good ventilation is high, and we can offer superior availability. We specialise in those parts of the ventilation system where we are the strongest. We adapt our offering to the local market, with our core ventilation offering as the clear common denominator in all markets.

THE IMPORTANCE OF VENTILATION

About 90 percent of the global population breathes poor air every day. A common misconception is that outdoor air is more polluted due to emissions, smog, and harmful chemicals. In fact, indoor air in homes, schools, offices, and factories can be as much as five times more polluted. People nonetheless spend most of their life indoors. The most common causes of indoor air pollution are mould; chemicals in, for example, furniture and building materials; dust; radon; and cigarette smoke; but above all, airborne particles from combustion and industrial processes, which are so small they can enter the human bloodstream via the respiratory system. Today, air pollution is a risk factor in several of the world's most common causes of death, including heart disease, pneumonia, stroke, diabetes, and lung cancer. Ventilation is an efficient and convenient method to remove those indoor air pollutants.

SUSTAINABILITY PLAN

For us, sustainability is a way of thinking and working. This affects how we work with Lindab's strategy in all areas. Everything from the purchases we make, to the deliveries and the service we offer our customers. Lindab has three long-term, non-financial targets for the business, one that focuses on increasing our attractiveness as an employer, one for reducing our own carbon dioxide emissions, and one for a better working environment.

Read more about Lindab's sustainability work and non-financial targets on <https://www.lindab.co.uk/For-a-better-climate/>



STEEL – A SUSTAINABLE MATERIAL

Steel provides products with a long service life. Steel has many advantages over other materials – it has a very long service life, is non-combustible and meets hygiene requirements. Steel is a fully recyclable material and scrap steel has a strong market position: steel recovered from structures and end products at the end of their lifecycle is efficiently recycled and re-used. We prioritise cooperation with steel suppliers driving development towards fossil-free steel and whose carbon dioxide intensity values are good. The steel we use must be free of particularly hazardous substances.

The use of steel in Lindab's products is what contributes most to Lindab's CO₂ emissions. The transition to fossil-free steel is Lindab's most significant individual action in terms of its effect on the environment. Through our collaboration with SSAB and H2 Green Steel, we will also be among the first in Europe to have access to CO₂ reduced steel in 2026. When it becomes available, we will make use of it in a green product line.

PRODUCT

PRODUCT DESCRIPTION

Lindab spiral duct is circular ventilation duct for air distribution to provide ventilation of buildings when used with Lindab Vent or Lindab Safe duct fittings.

The product is Eurovent certified.



PRODUCT RAW MATERIAL MAIN COMPOSITION

Raw material category	Amount, mass- %	Material origin
Metals	100%	EU
Minerals		
Fossil materials		
Bio-based materials		

BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

Biogenic carbon content in product, kg C	0
Biogenic carbon content in packaging, kg C	0

FUNCTIONAL UNIT AND SERVICE LIFE

Declared unit	1 kg of spiral duct
Mass per declared unit	1 kg
Functional unit	
Reference service life ¹	50 years

¹ The reference service life of the product is depending on the conditions of use. Under normal conditions it can be longer than 50 years.

SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm). More detailed information about the products material content can be found in the Building Product Declaration available [online](#).

PRODUCT LIFE-CYCLE

SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	x	x	MND	MND	MND	MND	MND	MND	MND	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND. Modules not relevant = MNR.

MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

The steel raw material is received from Lindabs own steel service center, Lindab Steel AB in Sweden. and goods inwards control is performed. The correct slitted coil is selected according to the manufacturing order. The unique ID number is connected to the manufacturing order for traceability.

The slitted coil is rigged in the spiral tube forming machine, followed by quality control of the first produced duct. If approved, the machine is set in auto mode. Quality control is done systematic on an hourly basis.

The produced ducts are placed in a steel stillage, labelled with the manufacturing order number. Ducts are picked in the warehouse and sent to the customer by truck.



TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions. Installation spills and handling of packaging material is considered. Material loss during installation is estimated to be zero.

Transport from production place to user (A4)

Type	Destination	Transportation method
Transportation	150	Lorry



PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD does not cover the use phase. These life cycle stages are dependent on how the product is used and should be developed and included as part of a holistic assessment of specific construction works.

PRODUCT END OF LIFE (C1-C4, D)

The ventilation ducts are assumed dismantled using hand tools (C1) and transported 50 km to a local recycling (C2). The product is then dismantled assuming average recovery of materials of 95% (according to World Steel Association, 2017) (C3). That is to be seen as the proportion of the material in the product that will be recycled (or re-used) in a subsequent system. It is assumed that the remaining 5% steel is taken to landfill for disposal (C4). Due to the recycling process, the recycled metals are credited an avoided production of primary steel (D).

MANUFACTURING PROCESS

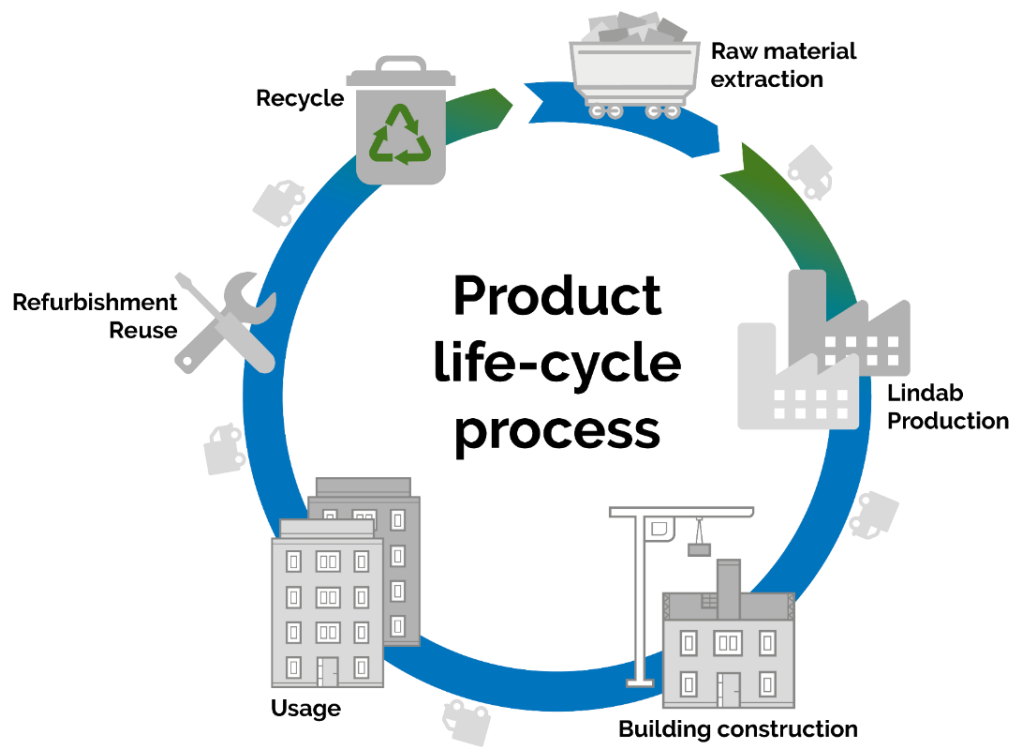

LIFE-CYCLE ASSESSMENT

CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. While cut-off criteria according to the PCR were employed, much data which would have fallen within that scope were included regardless, if available, resulting in a data set which is robust and captures all significant contributors to the LCA results.

There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

Data type	Allocation
Raw materials	Allocated by mass or volume
Packaging materials	Allocated by mass or volume
Ancillary materials	Allocated by mass or volume
Manufacturing energy and waste	Allocated by mass or volume

AVERAGES AND VARIABILITY

Type of average	No averaging
Averaging method	Not applicable
Variation in GWP-fossil for A1-A3	Not applicable

This EPD is product and factory specific and does not contain average calculations.

LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. For supplier specific data Arcelor specific data has been used. For other inputs Ecoinvent and One Click LCA databases were used as sources of environmental data.

ENVIRONMENTAL IMPACT DATA

CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – TOTAL¹⁾	kg CO ₂ e	2,67E+0	1,06E-01	1,77E-02	2,79E+00	1,66E-02	2,54E-03	MND	MND	MND	MND	MND	MND	MND	3,31E-05	4,70E-03	3,42E-02	5,36E-04	-1,44E+00
GWP – FOSSIL	kg CO ₂ e	2,68E+0	1,06E-01	1,75E-02	2,80E+00	1,66E-02	2,53E-03	MND	MND	MND	MND	MND	MND	MND	3,31E-05	4,69E-03	2,08E-02	2,63E-04	-1,44E+00
GWP – BIOGENIC	kg CO ₂ e	-1,39E-2	0,00E+0	2,49E-04	-1,36E-02	0,00E+0	9,80E-07	MND	MND	MND	MND	MND	MND	MND	6,06E-09	1,81E-06	1,34E-02	2,72E-04	0,00E+00
GWP – LULUC	kg CO ₂ e	4,80E-04	3,91E-05	2,73E-06	5,22E-04	6,13E-06	9,35E-07	MND	MND	MND	MND	MND	MND	MND	3,30E-09	1,73E-06	2,73E-05	2,49E-07	-2,83E-04
OZONE DEPLETION POT.	kg CFC-11e	1,00E-08	2,44E-08	1,86E-09	3,63E-08	3,82E-09	5,83E-10	MND	MND	MND	MND	MND	MND	MND	7,07E-12	1,08E-09	2,57E-09	1,07E-10	-4,66E-08
ACIDIFICATION POTENTIAL	mol H ⁺ e	6,66E-03	4,49E-04	8,00E-05	7,19E-03	7,03E-05	1,07E-05	MND	MND	MND	MND	MND	MND	MND	3,44E-07	1,99E-05	2,64E-04	2,48E-06	-7,11E-03
EP-FRESHWATER²⁾	kg Pe	0,00E+0	8,66E-07	2,28E-07	1,09E-06	1,36E-07	2,07E-08	MND	MND	MND	MND	MND	MND	MND	1,10E-10	3,84E-08	1,12E-06	2,76E-09	-8,67E-05
EP-MARINE	kg Ne	1,57E-03	1,34E-04	1,84E-05	1,72E-03	2,09E-05	3,19E-06	MND	MND	MND	MND	MND	MND	MND	1,52E-07	5,90E-06	5,58E-05	8,57E-07	-1,38E-03
EP-TERRESTRIAL	mol Ne	1,67E-02	1,47E-03	2,49E-04	1,84E-02	2,31E-04	3,52E-05	MND	MND	MND	MND	MND	MND	MND	1,67E-06	6,51E-05	6,45E-04	9,43E-06	-1,57E-02
POCP (“SMOG”)³⁾	kg NMVOCe	5,25E-03	4,72E-04	5,72E-05	5,78E-03	7,38E-05	1,13E-05	MND	MND	MND	MND	MND	MND	MND	4,59E-07	2,08E-05	1,77E-04	2,74E-06	-7,47E-03
ADP-MINERALS & METALS⁴⁾	kg Sbe	1,66E-04	2,49E-07	6,06E-08	1,66E-04	3,89E-08	5,94E-09	MND	MND	MND	MND	MND	MND	MND	1,68E-11	1,10E-08	2,80E-06	6,05E-10	-2,60E-05
ADP-FOSSIL RESOURCE	MJ	2,79E01	1,59E+00	1,99E-02	2,95E+01	2,49E-01	3,81E-02	MND	MND	MND	MND	MND	MND	MND	4,45E-04	7,05E-02	2,82E-01	7,22E-03	-1,18E+01
WATER USE⁵⁾	m ³ e depr.	5,17E-01	7,14E-03	4,11E-02	5,65E-01	1,12E-03	1,70E-04	MND	MND	MND	MND	MND	MND	MND	1,20E-06	3,15E-04	5,47E-03	2,29E-05	-6,76E-01

USE OF NATURAL RESOURCES

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
RENEW. PER AS ENERGY ⁸⁾	MJ	1,92E+00	1,80E-2	5,24E-2	1,99E+00	2,81E-3	4,29E-4	MND	MND	MND	MND	MND	MND	MND	2,54E-6	7,94E-4	5,00E-02	6,27E-05	-1,18
RENEW. PER AS MATERIAL	MJ	1,86E-01	0,00	-3,48E-03	1,83E-01	0,00	0,00	MND	MND	MND	MND	MND	MND	MND	0,00	0,00	-1,74E-01	-9,15E-03	0,00
TOTAL USE OF RENEW. PER	MJ	2,10E+00	1,80E-02	4,90E-02	2,17E+00	2,81E-03	4,29E-04	MND	MND	MND	MND	MND	MND	MND	2,54E-06	7,94E-04	-1,24E-01	-9,09E-03	-1,18E+00
NON-RE. PER AS ENERGY	MJ	2,91E+01	1,60E+00	6,15E-01	3,14E+01	2,49E-01	3,81E-02	MND	MND	MND	MND	MND	MND	MND	4,45E-04	7,05E-02	2,82E-01	7,22E-03	-1,18E+1
NON-RE. PER AS MATERIAL	MJ	1,05E-02	0,00	-1,96E-04	1,03E-02	0,00	0,00	MND	MND	MND	MND	MND	MND	MND	0,00	0,00	-9,79E-03	-5,15E-04	0,00
TOTAL USE OF NON-RE. PER	MJ	2,92E+01	1,60E+00	6,15E-01	3,14E+01	2,49E-01	3,81E-02	MND	MND	MND	MND	MND	MND	MND	4,45E-04	7,05E-02	2,72E-01	6,70E-03	-1,18E+1
SECONDARY MATERIALS	kg	5,05E-02	4,43E-04	1,80E-01	2,31E-01	6,93E-05	1,06E-05	MND	MND	MND	MND	MND	MND	MND	1,74E-07	1,96E-05	3,14E-04	1,52E-06	5,77E-1
RENEW. SECONDARY FUELS	MJ	5,47E-23	4,46E-06	4,93E-07	4,95E-06	6,99E-07	1,07E-07	MND	MND	MND	MND	MND	MND	MND	5,70E-10	1,97E-07	1,63E-05	3,96E-08	0,00
NON-REN. SECONDARY FUELS	MJ	6,43E-22	0,00	0,00	6,43E-22	0,00	0,00	MND	MND	MND	MND	MND	MND	MND	0,00	0,00	0,00	0,00	0,00
USE OF NET FRESH WATER	m³	2,98E-03	2,07E-04	4,63E-04	3,65E-03	3,23E-05	4,93E-06	MND	MND	MND	MND	MND	MND	MND	2,70E-08	9,13E-06	1,65E-04	7,90E-06	-9,96E-03

8) PER = Primary energy resources.

END OF LIFE – WASTE

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
HAZARDOUS WASTE	kg	4,43E-02	2,11E-03	5,20E-04	4,70E-02	3,31E-04	5,05E-05	MND	MND	MND	MND	MND	MND	MND	5,96E-07	9,34E-05	1,92E-03	0,00E+00	-5,60E-1
NON-HAZARDOUS WASTE	kg	1,32E-01	3,46E-02	8,31E-03	1,75E-01	5,43E-03	8,29E-04	MND	MND	MND	MND	MND	MND	MND	4,19E-06	1,54E-03	6,12E-02	5,00E-02	-4,71E+0
RADIOACTIVE WASTE	kg	4,68E-04	1,07E-05	7,25E-06	4,86E-04	1,67E-06	2,55E-07	MND	MND	MND	MND	MND	MND	MND	3,13E-09	4,71E-07	1,65E-06	0,00E+00	-2,20E-6

END OF LIFE – OUTPUT FLOWS

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
COMPONENTS FOR RE-USE	kg	4,29E-6	0,00E0	0,00E0	4,29E-6	0,00E0	1,80E-1	MND	MND	MND	MND	MND	MND	MND	0,00E0	0,00E0	0,00E0	0,00E0	0,00E0
MATERIALS FOR RECYCLING	kg	2,60E-2	0,00E0	6,90E-2	9,50E-2	0,00E0	0,00E0	MND	MND	MND	MND	MND	MND	MND	0,00E0	0,00E0	9,50E-1	0,00E0	0,00E0
MATERIALS FOR ENERGY REC	kg	0,00E0	0,00E0	0,00E0	0,00E0	0,00E0	0,00E0	MND	MND	MND	MND	MND	MND	MND	0,00E0	0,00E0	0,00E0	0,00E0	0,00E0
EXPORTED ENERGY	MJ	0,00E0	0,00E0	0,00E0	0,00E0	0,00E0	0,00E0	MND	MND	MND	MND	MND	MND	MND	0,00E0	0,00E0	0,00E0	0,00E0	0,00E0

ENVIRONMENTAL IMPACTS – EN 15804+A1, CML / ISO 21930

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GLOBAL WARMING POT.	kg CO ₂ e	2,65E+00	1,05E-01	1,75E-02	2,77E+00	1,64E-02	2,51E-03	MND	MND	MND	MND	MND	MND	MND	3,27E-05	4,64E-03	2,05E-02	2,58E-04	-1,38E+00
OZONE DEPLETION POT.	kg CFC-11e	7,48E-09	1,94E-08	1,46E-09	2,83E-08	3,03E-09	4,62E-10	MND	MND	MND	MND	MND	MND	MND	5,60E-12	8,55E-10	2,08E-09	8,43E-11	-4,06E-08
ACIDIFICATION	kg SO ₂ e	6,09E-03	3,49E-04	5,80E-05	6,50E-03	5,46E-05	8,34E-06	MND	MND	MND	MND	MND	MND	MND	2,45E-07	1,54E-05	2,13E-04	1,87E-06	-5,85E-03
EUTROPHICATION	kg PO ₄ ³ e	6,93E-04	7,95E-05	1,44E-05	7,87E-04	1,24E-05	1,90E-06	MND	MND	MND	MND	MND	MND	MND	5,69E-08	3,52E-06	7,05E-05	4,03E-07	-3,99E-03
POCP ("SMOG")	kg C ₂ H ₄ e	6,53E-04	1,36E-05	2,57E-06	6,69E-04	2,13E-06	3,25E-07	MND	MND	MND	MND	MND	MND	MND	5,36E-09	6,03E-07	8,07E-06	7,84E-08	-9,48E-04
ADP-ELEMENTS	kg Sbe	1,66E-04	2,41E-07	1,37E-07	1,66E-04	3,77E-08	5,75E-09	MND	MND	MND	MND	MND	MND	MND	1,65E-11	1,07E-08	2,80E-06	5,96E-10	-2,60E-05
ADP-FOSSIL	MJ	2,79E+01	1,59E+00	6,23E-01	3,01E+01	2,49E-01	3,81E-02	MND	MND	MND	MND	MND	MND	MND	4,45E-04	7,05E-02	2,82E-01	7,22E-03	-1,18E+01

ENVIRONMENTAL IMPACTS – GWP – GHG – THE INTERNATIONAL EPD SYSTEM

IMPACT CATEGORY	UNIT	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ¹⁾	kg CO ₂ e	2,68E+00	1,06E-01	1,75E-02	2,80E+00	1,66E-02	2,53E-03	MND	MND	MND	MND	MND	MND	MND	0.00E+0	0.00E+0	0.00E+0	0.00E+0	-1,44E+00

1) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product as defined by IPCC AR 5 (IPCC 2013). In addition, the characterisation factors for the flows - CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide - were updated in line with the guidance of IES PCR 1.2.5 Annex 1. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterization factor for biogenic CO₂ is set to zero.

VERIFICATION STATEMENT

VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliance with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? [Read more online](#)

This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

THIRD-PARTY VERIFICATION STATEMENT


I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

Magaly González Vázquez, as an authorized verifier acting for EPD Hub Limited
05.12.2023



ANNEX: CONVERSION TO WAIGHT PER METER

Diameter of duct (mm)	Standard weight (kg/m)
80	1.01
100	1.16
125	1.45
150	1,74
160	2.08
180	2.34
200	2.60
250	3.25
315	4.98
355	5.61
400	6.32
450	8.31
500	9.23
560	10.34
630	11.63
500	9,54
710	10.7
600	10.34
630	12,0
710	13.11
800	14.77
900	21,53
1000	23.92