




ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025 / ISO 21930

Glued Laminated Timber Tenri Shuseizai



EPD HUB, HUB-1488Published on 28.06.2024, last updated on 28.06.2024, valid until 28.06.2029.





一般情報 - GENERAL INFORMATION

メーカー - MANUFACTURER

メーカー名 Manufacturer	Tenri Shuseizai
住所 Address	710, Nishinagara-cho, Tenri-shi, Nara 632-0063 Japan
問い合わせ先 Contact details	tenri-kaji@gaia.eonet.ne.jp
ウェブサイト Website	-

EPD 規格、スコープ、認証機関 - EPD STANDARDS, SCOPE AND VERIFICATION

プログラムオペ レータ	EPD Hub, hub@epdhub.com
Program operator 参照規格 Reference standard	EN 15804+A2:2019 and ISO 14025
PCR PCR	EPD Hub Core PCR Version 1.1, 5 Dec 2023
製品カテゴリ Sector	Construction product
EPD カテゴリ Category of EPD	Third party verified EPD
親 EPD 番号 Parent EPD number	-
EPD のスコープ Scope of the EPD	Cradle to gate with modules C1-C4, D
EPD 申請者	Mika Takagi
EPD author	

EPD 検証 EPD verification	Independent verification of this EPD and data, according to ISO 14025: ☐ Internal verification ☑ External verification
EPD 検証	Haiha Nguyen, as an authorized verifier acting
EPD verifier	for EPD Hub Limited

The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

製品 - PRODUCT

製品名	Glued Laminated Timber
Product name	Gided Ediffillated Fiffiber
追加ラベル	_
Additional labels	
参照製品	_
Product reference	
製造地	710, Nishinagara-cho, Tenri-shi,
Place of production	Nara 632-0063 Japan
データ取得年	2023/01~2023/12
Period for data	2023/01 2023/12
EPD 平均化	No suggestion
Averaging in EPD	No averaging
A1-A3 の GWP-fossil 変動率	0/
Variation in GWP-fossil for A1-A3	- %



Glued Laminated Timber



環境影響データ概要 - ENVIRONMENTAL DATA SUMMARY

水元が音/ / NG - LIVINOIVILLI	VIAL DATA SOMMANT
宣言単位	1m3
Declared unit	
宣言単位あたりの質量	520 kg
Declared unit mass	
GWP-fossil, A1-A3 (kgCO2e)	2,46E+02
GWP-fossil, A1-A3 (kgCO2e)	
GWP-total, A1-A3 (kgCO2e)	-5,45E+02
GWP-total, A1-A3 (kgCO2e)	
副資材の投入(%)	0.09
Secondary material, inputs (%)	
副資材のアウトプット(%)	92.2
Secondary material, outputs (%)	
エネルギー使用量計, A1-A3	
(kWh)	3140
Total energy use, A1-A3 (kWh)	
水使用量計、A1-A3 (m3)	0.81
Net freshwater use, A1-A3 (m3)	





製品とメーカー-PRODUCT AND MANUFACTURER

メーカーの概要 - ABOUT THE MANUFACTURER

Tenri Shuseizai Co., Ltd is a manufacturer of structural glued laminated timber located in Tenri, Nara. We produce structural glued laminated timber made of European red pine and European spruce.

Monthly output of glued laminated timber is approximately 3,500 m3/month. Our production site also has facilities to produce wood pellets from sawdust which is generated during production.

•

製品説明 - PRODUCT DESCRIPTION

Structural glued laminated timber is manufactured by planing raw material - solid lumber (lamina), applying adhesive on its surface, and finally bonding them together. The product is JAS-certified and mainly used as structural beams and columns for residence.

Further information can be found at -.

主な原材料構成 - PRODUCT RAW MATERIAL MAIN COMPOSITION

原材料カテゴリ Raw material category	量、質量 - % Amount, mass- %	原材料源 Material origin
金属 Metals	0	-
鉱物 Minerals	0	-
化石原料 Fossil materials	1	Japan
バイオマス原料 Bio-based materials	99	EU

生物起源 CO2 含有量 - BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

製品の生物起源 CO2 含有量、kg C Biogenic carbon content in product, kg C	216.064
梱包の生物起源 CO2 含有量、kg C Biogenic carbon content in packaging, kg C	0.0067

機能単位と耐用年数 - FUNCTIONAL UNIT AND SERVICE LIFE

宣言単位	1m3
Declared unit	
宣言単位あたりの質量	520 kg
Mass per declared unit VP	
機能単位	-
Functional unit	
参照耐用年数	-
Reference service life	

化学物質、REACH 高懸念物質 - SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).





製品のライフサイクル - PRODUCT LIFE-CYCLE

システム境界 - SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Pro	duct s	tage		embl age		Use stage						Е	nd of I	ife stag		Beyo sy bour	stem	1
A1	A2	А3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	C3	C4		D	
×	x	x	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	MN D	X	x	X	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = MND, Modules not relevant = MNR.

製造と梱包 - MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

Structural glued laminated timber is manufactured by planing raw material - solid lumber (lamina), applying adhesive (water-based isocyanate or resorcinol-based) on its surface, and finally bonding them together. Lamina is produced in European sawmills and transported to Japan by container ship. The final product is packaged and shipped in polyethylene film.

Electricity, LPG, light fuel, and petrol are used to operate machinery and equipment. There are two types of electricity used in the manufacturing process:

(1) Electricity purchased from the power companies. Since we subscribe to

a renewable energy plan, 20% of its total supply is generated from non-fossil fuels.

②Electricity generated by the photovoltaic system installed on the roof of our factory. It is 100% consumed in-house.

One waste product generated during the manufacturing process of laminated wood is wood offcuts. These are divided into two categories: those that are turned into wood chips and incinerated for use as fuel, and those that are sold externally. The latter, which is sold externally, is considered a co-product and is excluded from the calculation. After being used as fuel, the cinders are taken to an outside contractor and 100% of them are disposed of in a landfill.

輸送と据付 - TRANSPORT AND INSTALLATION (A4-A5)

Transportation impacts occurred from final products delivery to construction site (A4) cover fuel direct exhaust emissions, environmental impacts of fuel production, as well as related infrastructure emissions.

This EPD excludes the transport and installation stage. It is not common in Japan to include A4-A5 in declaration as well as we do not have data for calculations. It is excluded because the impacts are assumed to be very little, and it is not mandated by standards.

製品使用とメンテナンス - PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD excludes the use stage.

Air, soil, and water impacts during the use phase have not been studied.

製品の廃棄・リサイクル段階 - PRODUCT END OF LIFE (C1-C4, D)

In this EPD, end-of-life scenarios are developed for each material categories. Energy considered for demolition of building (C1) is considered negligible and transportation distance and methods to the treatment facilities (C2) are assumed to be 50km by a truck in all scenarios.





This LCA claims the load and benefit from the recycling and incineration with energy recovery potential of the sorted materials at EoL, namely wood, cardboard, and plastics" to C1-C4, D of the report.

Wooden materials:

At the end of its lifetime, a timber product can have several end of life scenario options. Because of the uncertainties surrounding waste disposal practices in the future, exact methods of disposal at the end of life is hard to determine. In this EPD, 92.1% of product wastes are assumed to be chipped for the future use as secondary material, 6.3% are assumed to be incinerated without energy recovery, and 1.6% are assumed to be landfilled. The scenario is based on the results of a Survey of construction by-products in 2018 published by the Ministry of Land, Infrastructure and Transport, with the assumption of no material recycled between construction sites.

As this EPD does not include A5 stage, packaging wastes are considered in the end-of-life stage.

Plastic wastes:

Plastic wastes are assumed to be 25% recycled, 63% incinerated with energy recovery, 7% incinerated without energy recovery, and 6% landfilled. This scenario is based on the survey report published by Japan Plastic Recycling and Reuse Association in 2023.

Paperboard:


According to the website of National Federation of Corrugated Industries Associations, more than 95% of the waste paperboards are collected at proper facilities, and of which about 90% are recycled as secondary paperboard. Based on this, the waste paperboards are assumed to be 90% recycled and 10% landfilled as the most conservative case.



6



製造プロセス - MANUFACTURING PROCESS

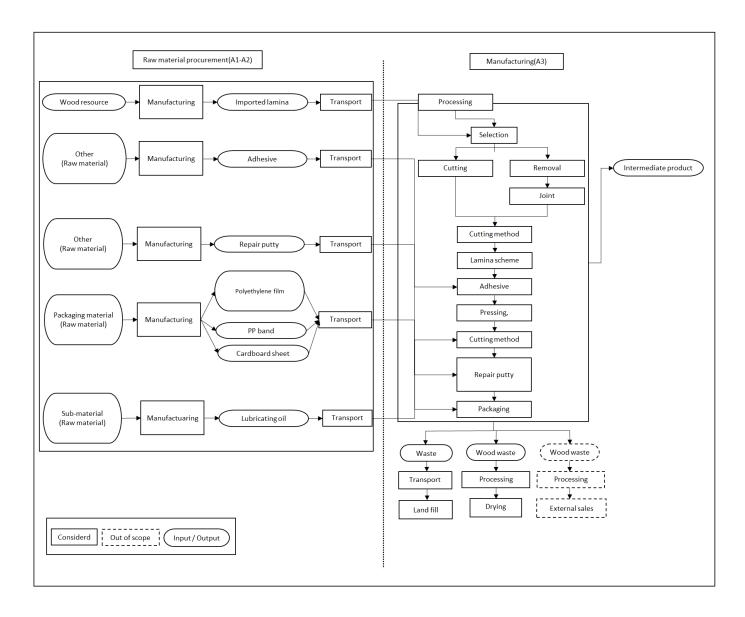

7





ライフサイクルアセスメント-LIFE-CYCLE

ASSESSMENT

カットオフ基準 - CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

配分、推定 - ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

データタイプ - Data type	配分 - Allocation
原材料 - Raw materials	Allocated by mass or volume
梱包材 - Packaging materials	Allocated by mass or volume
補助材料 - Ancillary materials	Allocated by mass or volume
製造エネルギーと廃棄物 - Manufacturing energy and waste	Allocated by mass or volume

平均値と変動率 - AVERAGES AND VARIABILITYVP

平均化の種類 - Type of average	No averaging
平均化の方法 - Averaging method	Not applicable
A1-A3 における GWP-fossil の変 動率 - Variation in GWP-fossil for A1-A3	- %

LCA ソフトウェアと参考文献 - LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent v3.8 and One Click LCA databases were used as sources of environmental data.





環境影響データ - ENVIRONMENTAL IMPACT DATA

主な環境影響指標 - CORE ENVIRONMENTAL IMPACT INDICATORS - EN 15804+A2, PEF

Impact category	Unit	A1	A2	А3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	С3	C4	D
GWP – total ¹⁾	kg CO₂e	-7,11E+02	1,41E+02	2,40E+01	-5,45E+02	MND	MNR	3,60E+00	7,95E+02	1,33E+01	-1,45E+01								
GWP – fossil	kg CO₂e	8,11E+01	1,41E+02	2,39E+01	2,46E+02	MND	MNR	3,60E+00	1,60E+01	6,17E-01	-1,43E+01								
GWP – biogenic	kg CO₂e	-7,92E+02	0,00E+00	2,52E-02	-7,92E+02	MND	MNR	0,00E+00	7,79E+02	1,27E+01	0,00E+00								
GWP – LULUC	kg CO₂e	5,00E-01	1,01E-01	4,01E-02	6,42E-01	MND	MNR	1,54E-03	7,84E-02	2,59E-04	-1,59E-01								
Ozone depletion pot.	kg CFC-11e	1,43E-05	2,81E-05	1,24E-06	4,37E-05	MND	MNR	7,97E-07	1,04E-06	6,18E-08	-1,07E-06								
Acidification potential	mol H⁺e	5,97E-01	4,39E+00	1,18E-01	5,11E+00	MND	MNR	1,98E-02	8,60E-02	6,14E-03	-7,83E-02								
EP-freshwater ²⁾	kg Pe	3,49E-03	5,35E-04	7,24E-04	4,75E-03	MND	MNR	3,16E-05	9,92E-04	8,58E-06	-1,40E-03								
EP-marine	kg Ne	1,85E-01	1,08E+00	1,87E-02	1,28E+00	MND	MNR	6,88E-03	2,08E-02	3,14E-03	-1,91E-02								
EP-terrestrial	mol Ne	1,98E+00	1,20E+01	2,08E-01	1,42E+01	MND	MNR	7,57E-02	2,29E-01	2,99E-02	-2,07E-01								
POCP ("smog") ³⁾	kg NMVOCe	5,86E-01	3,11E+00	6,34E-02	3,76E+00	MND	MNR	2,18E-02	7,11E-02	7,71E-03	-8,92E-02								
ADP-minerals & metals ⁴⁾	kg Sbe	3,46E-04	2,10E-04	1,16E-04	6,71E-04	MND	MNR	1,23E-05	2,86E-05	1,68E-06	-2,90E-05								
ADP-fossil resources	MJ	8,40E+02	1,78E+03	2,95E+02	2,92E+03	MND	MNR	5,30E+01	1,94E+02	6,37E+00	-1,76E+02								
Water use ⁵⁾	m³e depr.	3,60E+01	5,43E+00	7,44E+00	4,89E+01	MND	MNR	2,43E-01	3,10E+00	2,20E+00	-3,32E+00								

¹⁾ GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential; 5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.





追加(オプション)の環境影響指標 - ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, PEF

Impact category	Unit	A1	A2	А3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	D
Particulate matter	Incidence	1,36E-05	4,69E-06	5,47E-07	1,88E-05	MND	MNR	3,84E-07	8,75E-07	7,27E-08	-8,34E-07								
Ionizing radiation ⁶⁾	kBq U235e	3,80E+00	8,21E+00	3,48E+00	1,55E+01	MND	MNR	2,49E-01	1,42E+00	1,94E-02	- 1,26E+00								
Ecotoxicity (freshwater)	CTUe	2,19E+03	1,16E+03	3,45E+02	3,69E+03	MND	MNR	4,92E+01	2,99E+02	1,03E+01	- 3,18E+02								
Human toxicity, cancer	CTUh	2,75E-07	8,32E-08	1,50E-08	3,73E-07	MND	MNR	1,68E-09	8,87E-09	1,49E-09	-1,06E-08								
Human tox. non- cancer	CTUh	2,93E-06	7,63E-07	2,59E-07	3,95E-06	MND	MNR	5,00E-08	1,85E-07	7,10E-08	-2,28E-07								
SQP ⁷⁾	-	4,55E+04	2,97E+02	1,89E+03	4,77E+04	MND	MNR	4,54E+01	1,36E+04	6,36E+00	- 1,19E+04								

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

天然資源の利用 - USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	А3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	С3	C4	D
Renew. PER as energy ⁸⁾	MJ	7,56E+03	1,27E+01	3,62E+02	7,93E+03	MND	MNR	6,48E-01	2,23E+03	1,44E-01	- 2,56E+03								
Renew. PER as material	MJ	7,84E+03	0,00E+00	0,00E+00	7,84E+03	MND	MNR	0,00E+00	-7,71E+03	-1,25E+02	0,00E+00								
Total use of renew. PER	MJ	1,54E+04	1,27E+01	3,62E+02	1,58E+04	MND	MNR	6,48E-01	-5,48E+03	-1,25E+02	- 2,56E+03								
Non-re. PER as energy	MJ	1,28E+03	1,78E+03	3,22E+02	3,38E+03	MND	MNR	5,30E+01	1,94E+02	6,37E+00	- 1,77E+02								
Non-re. PER as material	MJ	8,02E+01	0,00E+00	4,37E+00	8,46E+01	MND	MNR	0,00E+00	-8,30E+01	-1,55E+00	0,00E+00								
Total use of non-re. PER	MJ	1,36E+03	1,78E+03	3,26E+02	3,47E+03	MND	MNR	5,30E+01	1,11E+02	4,82E+00	- 1,77E+02								
Secondary materials	kg	4,74E-01	8,05E-01	8,25E-02	1,36E+00	MND	MNR	1,77E-02	1,04E-01	1,10E-02	-5,19E-01								
Renew. secondary fuels	MJ	3,00E-02	2,48E-03	3,99E-03	3,65E-02	MND	MNR	2,17E-04	2,06E-03	5,25E-05	-1,41E-03								
Non-ren. secondary fuels	MJ	2,06E-01	0,00E+00	0,00E+00	2,06E-01	MND	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00								
Use of net fresh water	m³	4,28E-01	1,19E-01	2,59E-01	8,06E-01	MND	MNR	6,70E-03	7,95E-02	-4,70E-03	-8,64E-02								

⁸⁾ PER = Primary energy resources.





廃棄・リサイクル段階 — 廃棄 - END OF LIFE - WASTE

Impact category	Unit	A1	A2	А3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	С3	C4	D
Hazardous waste	kg	4,63E+00	2,44E+00	1,90E+00	8,97E+00	MND	MNR	7,78E-02	1,30E+00	0,00E+00	-1,16E+00								
Non-hazardous waste	kg	9,71E+01	2,10E+01	2,59E+01	1,44E+02	MND	MNR	1,25E+00	2,56E+01	4,12E+01	-2,17E+01								
Radioactive waste	kg	4,09E-03	1,26E-02	1,15E-03	1,78E-02	MND	MNR	3,50E-04	6,48E-04	0,00E+00	-6,28E-04								

廃棄・リサイクル段階 一出力フロー - END OF LIFE - OUTPUT FLOWS

Impact category	Unit	A1	A2	А3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	С3	C4	D
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	MND	MNR	0,00E+00	0,00E+00	0,00E+00	0,00E+00								
Materials for recycling	kg	1,00E+00	0,00E+00	0,00E+00	1,00E+00	MND	MNR	0,00E+00	4,79E+02	0,00E+00	0,00E+00								
Materials for energy rec	kg	5,40E-01	0,00E+00	5,69E+01	5,74E+01	MND	MNR	0,00E+00	6,63E-02	0,00E+00	0,00E+00								
Exported energy	MJ	6,60E+00	0,00E+00	0,00E+00	6,60E+00	MND	MNR	0,00E+00	1,98E+00	0,00E+00	0,00E+00								

環境影響 - ENVIRONMENTAL IMPACTS - EN 15804+A1, CML / ISO 21930

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO₂e	1,05E+02	1,40E+02	2,34E+01	2,68E+02	MND	MNR	3,56E+00	1,57E+01	1,22E+00	-1,40E+01								
Ozone depletion Pot.	kg CFC ₋₁₁ e	1,66E-05	2,22E-05	1,04E-06	3,99E-05	MND	MNR	6,32E-07	8,43E-07	5,15E-08	-8,65E-07								
Acidification	kg SO₂e	5,49E-01	3,51E+00	9,87E-02	4,16E+00	MND	MNR	1,49E-02	6,89E-02	4,36E-03	-6,28E-02								
Eutrophication	kg PO₄³e	2,05E-01	3,93E-01	3,20E-02	6,30E-01	MND	MNR	3,53E-03	2,67E-02	2,85E-02	-2,41E-02								
POCP ("smog")	kg C ₂ H ₄ e	4,93E-02	9,07E-02	4,63E-03	1,45E-01	MND	MNR	5,00E-04	4,34E-03	2,83E-04	-8,48E-03								
ADP-elements	kg Sbe	1,50E-03	2,06E-04	1,20E-04	1,83E-03	MND	MNR	1,20E-05	2,82E-05	1,51E-06	-2,85E-05								
ADP-fossil	MJ	1,49E+03	1,78E+03	3,26E+02	3,60E+03	MND	MNR	5,30E+01	1,94E+02	6,37E+00	-1,76E+02								





検証報告 - VERIFICATION STATEMENT

本 EPD の検証プロセス - VERIFICATION PROCESS FOR THIS EPD

This EPD has been verified in accordance with ISO 14025 by an independent, third-party verifier by reviewing results, documents and compliancy with reference standard, ISO 14025 and ISO 14040/14044, following the process and checklists of the program operator for:

- This Environmental Product Declaration
- The Life-Cycle Assessment used in this EPD
- The digital background data for this EPD

Why does verification transparency matter? Read more online
This EPD has been generated by One Click LCA EPD generator, which has been verified and approved by the EPD Hub.

第三者検証報告 - THIRD-PARTY VERIFICATION STATEMENT

I hereby confirm that, following detailed examination, I have not established any relevant deviations by the studied Environmental Product Declaration (EPD), its LCA and project report, in terms of the data collected and used in the LCA calculations, the way the LCA-based calculations have been carried out, the presentation of environmental data in the EPD, and other additional environmental information, as present with respect to the procedural and methodological requirements in ISO 14025:2010 and reference standard.

I confirm that the company-specific data has been examined as regards plausibility and consistency; the declaration owner is responsible for its factual integrity and legal compliance.

I confirm that I have sufficient knowledge and experience of construction products, this specific product category, the construction industry, relevant standards, and the geographical area of the EPD to carry out this verification.

I confirm my independence in my role as verifier; I have not been involved in the execution of the LCA or in the development of the declaration and have no conflicts of interest regarding this verification.

HaiHa Nguyen, as an authorized verifier acting for EPD Hub Limited 28.06.2024





