



ENVIRONMENTAL PRODUCT DECLARATION

IN ACCORDANCE WITH EN 15804+A2 & ISO 14025

CHUKOH FLO™ Mesh Type Fabric FGF-412-25-1
Chukoh Chemical Industries,Ltd.



EPD HUB, HUB-5039

Published on 23.01.2026, last updated on 23.01.2026, valid until 22.01.2031

Life Cycle Assessment study has been performed in accordance with the requirements of EN 15804, EPD Hub PCR version 1.2 (24 Mar 2025) and JRC characterization factors EF 3.1.



Created with One Click LCA



一般情報 - GENERAL INFORMATION

メーカー

MANUFACTURER

メーカー名 Manufacturer	Chukoh Chemical Industries,Ltd.
住所 Address	26F Akasaka Intercity AIR, 1-8-1 Akasaka, Minato-ku, Tokyo 107-0052, Japan
問い合わせ先 Contact details	kanazawa@chukoh.co.jp
ウェブサイト Website	https://www.chukoh.co.jp/

This EPD is intended for business-to-business and/or business-to-consumer communication. The manufacturer has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804 and if they are not compared in a building context.

EPD 規格、スコープ、認証機関

EPD STANDARDS, SCOPE AND VERIFICATION

プログラムオペレータ Program operator	EPD Hub, hub@epdhub.com
参照規格 Reference standard	EN 15804:2012+A2:2019/AC:2021 and ISO 14025
PCR PCR	EPD Hub Core PCR Version 1.2, 24 Mar 2025
製品カテゴリ Sector	Construction product
EPD カテゴリ Category of EPD	Third party verified EPD
親 EPD 番号 Parent EPD number	-
EPD のスコープ Scope of the EPD	Cradle to gate with modules C1-C4, D
EPD 申請者 EPD author	Tomoyuki Kanazawa
EPD 検証 EPD verification	Independent verification of this EPD and data, according to ISO 14025: <input type="checkbox"/> Internal verification <input checked="" type="checkbox"/> External verification
EPD 検証 EPD verifier	Yazan Badour as an authorized verifier for EPD Hub

製品 - PRODUCT

製品名 Product name	CHUKOH FLO™ Mesh Type Fabric FGF-412-25-1
追加ラベル Additional labels	-
参照製品 Product reference	FGF-412-25-1
原材料の原産地 Place(s) of raw material origin	Japan, China
製造地 Place of production	1642-12 Kitamen, Imafuku-cho, Matsuura City, Nagasaki Prefecture 859-4521, Japan
設置場所および使用場所 Place(s) of installation and use	-
データ取得年 Period for data	2024/10 - 2025/9
EPD 平均化 Averaging in EPD	No grouping
A1-A3 の GWP-fossil 変動率 Variation in GWP-fossil for A1-A3 (%)	-
国際貿易商品番号 Global Trade Item Number (GTIN)	-
ノルウェー建築製品データベース Norwegian Building Product Database (NOBB)	-
A1-A3 特定データ (%) A1-A3 Specific data (%)	13.9

環境影響データ概要 - ENVIRONMENTAL DATA SUMMARY

宣言単位 Declared unit	1 m ²
宣言単位あたりの質量 Declared unit mass	0,73 kg
包装の質量 Mass of packaging	1,05 kg
GWP-fossil, A1-A3 (kgCO2e)	6.69
GWP-fossil, A1-A3 (kgCO2e)	4.89
GWP-total, A1-A3 (kgCO2e)	4.89
GWP-total, A1-A3 (kgCO2e)	0.84
副資材の投入(%) Secondary material, inputs (%)	100
副資材のアウトプット(%) Secondary material, outputs (%)	29.1
エネルギー使用量計, A1-A3 (kWh)	0.03
Total energy use, A1-A3 (kWh)	Net fresh water use, A1-A3 (m3)
水使用量計、A1-A3 (m3)	0.03

製品とメーカー -PRODUCT AND MANUFACTURER

メーカーの概要 - ABOUT THE MANUFACTURER

Chukoh Chemical Industries, Ltd. is a processing manufacturer of High-Performance Polymers, primarily fluoroplastic, supplying diverse products across many fields including food, semiconductors, automotive, electronic components, construction, and medical industries.

Since its establishment in 1963, we have developed many products, mainly focusing on fluoroplastic molded products and composite products of glass fiber and fluoroplastic. These products are adopted not only in Japan but also worldwide, including neighboring countries such as China, South Korea, Taiwan, and Southeast Asian countries, as well as in Western and the Middle Eastern countries.

Among these products, the FGT series of architectural membrane materials, introduced in 1984, has been highly evaluated globally. Due to its lightweight properties and weatherability, its adoption have expanded to large-scale facilities such as stadiums and airports, as well as structures closely connected to daily life, like train stations.

We hold ISO certifications for environmental management (ISO 14001) as well as for quality (ISO 9001). By providing products that leverage our strengths, we aim to resolve customer issues while enhancing environmental sustainability.

製品説明 - PRODUCT DESCRIPTION

FGF-412-25-1 of architectural membrane materials is used in membrane structure architecture.

This product is a material made by coating glass fiber with fluoroplastic,

leveraging the many excellent properties of fluoroplastic and the toughness of glass fiber.

Fluoroplastics remain unaffected by external factors due to their numerous properties such as UV, chemical and heat resistance. Combined with the toughness of the glass cloth, it can withstand long-term outdoor use.

Moreover, due to its composition, it is much lighter than other building materials, contributing to structural lightness and improved safety during disasters.

The quality of the FGT-412-25-1 has received top-ranking evaluations worldwide and has been adopted globally. It is used as roofing in venues for major international sports events, transportation facilities such as airports that support the lives of many people, as well as educational and cultural facilities, and commercial establishments.

Product specifications

Product No.	FGF-412-25-1
Product width	2800 mmW
Base fabric	Glass EC6
JIS R 3413	
Weave style	Mock-leno
JIS R 3420	
Weight (g/m ²)	700±100
JIS K 6404-1	
Tensile (N/5 cm) warp / weft	5000 or more
JIS L 1096	4500 or more
Open area(%)	14±5

Values above are specification values. We reserve modifications of the mentioned values for technical reasons.

Further information can be found at:
<https://www.chukoh.co.jp/>

主な原材料構成 - PRODUCT RAW MATERIAL MAIN COMPOSITION

原材料カテゴリ Raw material category	量、質量 - % Amount, mass- %	原材料源 Material origin
金属 Metals	-	-
鉱物 Minerals	100	Japan, China
化石原料 Fossil materials	-	-
バイオマス原料 Bio-based materials	-	-

生物起源 CO₂ 含有量 - BIOGENIC CARBON CONTENT

Product's biogenic carbon content at the factory gate

製品の生物起源 CO ₂ 含有量、kg C Biogenic carbon content in product, kg C	9.87E-05
梱包の生物起源 CO ₂ 含有量、kg C Biogenic carbon content in packaging, kg C	4.94E-01

機能単位と耐用年数 - FUNCTIONAL UNIT AND SERVICE LIFE

宣言単位 Declared unit	1 m ²
宣言単位あたりの質量 Mass per declared unit	0,73 kg
機能単位 Functional unit	-
参考耐用年数 Reference service life	-

化学物質、REACH 高懸念物質 - SUBSTANCES, REACH - VERY HIGH CONCERN

The product does not contain any REACH SVHC substances in amounts greater than 0,1 % (1000 ppm).

製品のライフサイクル - PRODUCT LIFE-CYCLE

システム境界 - SYSTEM BOUNDARY

This EPD covers the life-cycle modules listed in the following table.

Product stage			Assembly stage		Use stage							End of life stage				Beyond the system boundaries		
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D		
x	x	x	ND	ND	ND	ND	ND	ND	ND	ND	ND	x	x	x	x	x		
Raw materials	Transport	Manufacturing	Transport	Assembly	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstr./demol.	Transport	Waste processing	Disposal	Reuse	Recovery	Recycling

Modules not declared = ND. Modules not relevant = MNR.

製造と梱包 - MANUFACTURING AND PACKAGING (A1-A3)

The environmental impacts considered for the product stage cover the manufacturing of raw materials used in the production as well as packaging materials and other ancillary materials. Also, fuels used by machines, and handling of waste formed in the production processes at the manufacturing facilities are included in this stage. The study also considers the material losses occurring during the manufacturing processes as well as losses during electricity transmission.

A market-based approach is used in modelling the electricity mix utilized in the factory.

This product is made by impregnating glass fabric with fluororesin and then baking it.

The raw materials are procured in China and within Japan, and are

delivered to our factory in Matsuura by ship and truck.

The main manufacturing processes are resin compounding and coating. After coating, the products are inspected, packaged, and then shipped.

The manufacturing process requires electricity, heat, and water to operate machinery and equipment.

The final product is packed and shipped in plastic sheets, Minafoam® and wooden shipping crates.

Leftover raw materials, product trimmings, and defective products generated during processing are disposed of as industrial waste in landfills.

However, if they are deemed too damaged for continued use, they are disposed of as combustible waste and incinerated.

輸送と据付 - TRANSPORT AND INSTALLATION (A4-A5)

This EPD excludes the A4-A5 stage. It is not common in Japan to include A4-A5 in declaration as well as we do not have data for calculations. It is excluded because the impacts are assumed to be very little and it is not mandated by standards. As this EPD excludes module A5, all the packaging wastes are considered in the EOL stage.

製品使用とメンテナンス - PRODUCT USE AND MAINTENANCE (B1-B7)

This EPD excludes the use stage.

製品の廃棄・リサイクル段階 - PRODUCT END OF LIFE (C1-C4, D)

It is assumed that 0.00156 L/kg of diesel fuel will be consumed for demolition (C1). This scenario is based on Revised New Demolition Methods and Estimation published by Economic Research Association in April 2017. Transportation distance and methods to the treatment facilities (C2) are assumed to be 50km by a truck in all scenarios. In this EPD, end-of-life scenarios are developed for each material categories.

Membrane products:


As the product contains fluoroplastic, 100% are assumed to be landfilled as the conservative scenario instead of incineration.

As this EPD does not include A5 stage, packaging wastes are considered in the end-of-life stage.

Plastic wastes: Plastic wastes are assumed to be 25% recycled, 63% incinerated with energy recovery, 7% incinerated without energy recovery, and 6% landfilled. This scenario is based on the survey report published by Japan Plastic Recycling and Reuse Association in 2023.

Wooden box: 80% are collected by us and reused as is. The remaining 20% are assumed to be damaged and will be discarded and incinerated without energy recovery. The scenario is based on the internal data.

製造プロセス - SYSTEM DIAGRAM

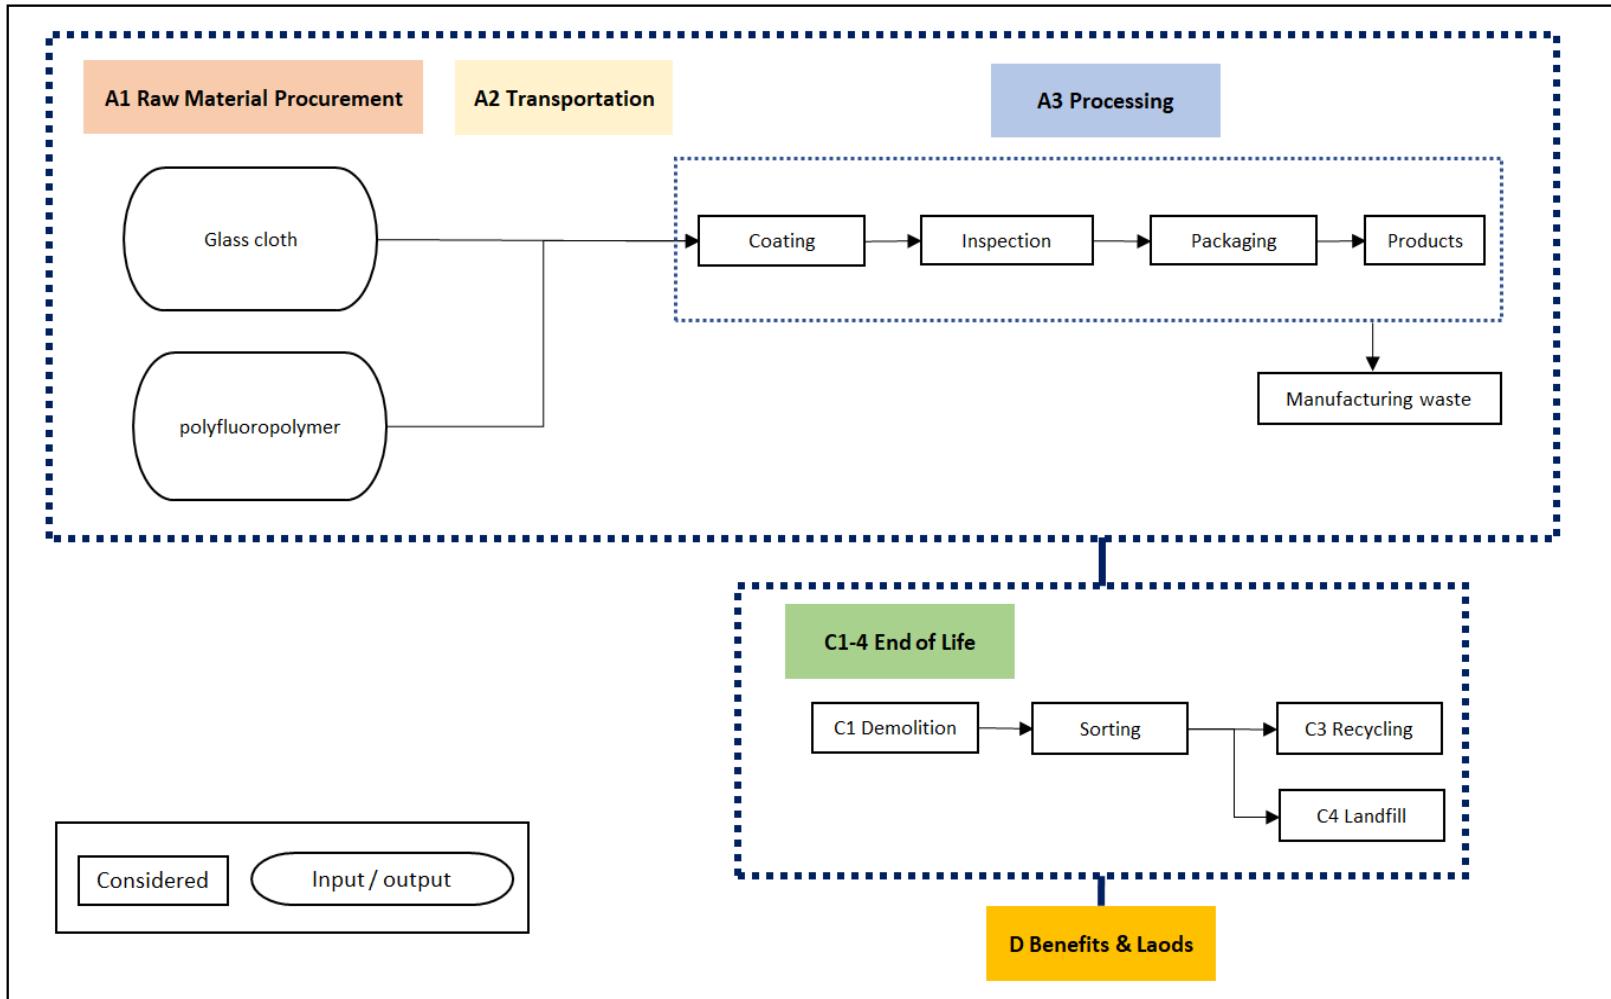

ライフサイクルアセスメント - LIFE-CYCLE ASSESSMENT

カットオフ基準 - CUT-OFF CRITERIA

The study does not exclude any modules or processes which are stated mandatory in the reference standard and the applied PCR. The study does not exclude any hazardous materials or substances. The study includes all major raw material and energy consumption. All inputs and outputs of the unit processes, for which data is available for, are included in the calculation. There is no neglected unit process more than 1% of total mass or energy flows. The module specific total neglected input and output flows also do not exceed 5% of energy usage or mass.

The production of capital equipment, construction activities, and infrastructure, maintenance and operation of capital equipment, personnel-related activities, energy and water use related to company management and sales activities are excluded.

データの検証- VALIDATION OF DATA

Data collection for production, transport, and packaging was conducted using time and site-specific information, as defined in the general information section on page 1 and 2. Upstream process calculations rely on generic data as defined in the Bibliography section. Manufacturer-provided specific and generic data were used for the product's manufacturing stage. The analysis was performed in One Click LCA EPD Generator, with the 'Cut-Off, EN 15804+A2' allocation method, and characterization factors according to EN 15804:2012+A2:2019/AC:2021 and JRC EF 3.1.

配分、推定 - ALLOCATION, ESTIMATES AND ASSUMPTIONS

Allocation is required if some material, energy, and waste data cannot be measured separately for the product under investigation. All allocations are done as per the reference standards and the applied PCR. In this study, allocation has been done in the following ways:

データタイプ - Data type	配分 - Allocation
原材料 - Raw materials	No allocation
梱包材 - Packaging materials	No allocation
補助材料 - Ancillary materials	Allocated by mass or volume
製造エネルギーと廃棄物 - Manufacturing energy and waste	Allocated by mass or volume

製品と製造拠点のグループ化 - PRODUCT & MANUFACTURING SITES GROUPING

グループ化の種類 - Type of grouping	No grouping
グループ化方法 - Grouping method	Not applicable
A1-A3 における GWP-fossil の変動率 - Variation in GWP-fossil for A1-A3 (%)	-

This EPD is product and factory specific and does not contain average calculations.

LCA ソフトウェアと参考文献 - LCA SOFTWARE AND BIBLIOGRAPHY

This EPD has been created using One Click LCA EPD Generator for EPD Hub V3 and EPD System Verification v3.2.3. The LCA and EPD have been prepared according to the reference standards and ISO 14040/14044. Ecoinvent v3.10.1 and One Click LCA databases were used as sources of environmental data. Allocation used in Ecoinvent 3.10.1 environmental data sources follow the methodology 'allocation, Cut-off, EN 15804+A2'.

環境影響データ - ENVIRONMENTAL IMPACT DATA

The estimated impact results are only relative statements which do not indicate the end points of the impact categories, exceeding threshold values, safety margins or risks.

主な環境影響指標 - CORE ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP – total ¹⁾	kg CO ₂ e	5.27E+00	4.86E-01	-8.59E-01	4.89E+00	ND	4.36E-03	1.39E-02	1.45E+00	4.33E-01	1.12E+00								
GWP – fossil	kg CO ₂ e	5.26E+00	4.86E-01	9.47E-01	6.69E+00	ND	4.36E-03	1.39E-02	3.15E-03	7.17E-02	-3.28E-01								
GWP – biogenic	kg CO ₂ e	2.76E-03	6.58E-05	-1.81E+00	-1.80E+00	ND	4.44E-07	1.30E-06	1.45E+00	3.61E-01	1.45E+00								
GWP – LULUC	kg CO ₂ e	2.20E-03	2.31E-04	1.34E-03	3.77E-03	ND	4.46E-07	6.33E-06	5.77E-08	6.51E-06	-9.51E-04								
Ozone depletion pot.	kg CFC-11e	5.94E-08	6.97E-09	2.30E-08	8.93E-08	ND	6.67E-11	2.02E-10	5.73E-13	2.49E-10	-3.89E-09								
Acidification potential	mol H ⁺ e	1.88E-02	2.12E-03	5.22E-03	2.62E-02	ND	3.93E-05	6.29E-05	5.16E-07	9.56E-05	-2.12E-03								
EP-freshwater ²⁾	kg Pe	3.91E-01	3.80E-05	2.92E-04	3.92E-01	ND	1.26E-07	1.10E-06	1.13E-08	2.32E-06	-8.67E-05								
EP-marine	kg Ne	4.02E-03	4.99E-04	1.83E-03	6.35E-03	ND	1.82E-05	2.36E-05	2.90E-07	1.55E-03	-5.73E-04								
EP-terrestrial	mol Ne	4.32E-02	5.47E-03	1.27E-02	6.14E-02	ND	2.00E-04	2.58E-04	2.40E-06	4.20E-04	-6.32E-03								
POCP ("smog") ³⁾	kg NMVOCe	1.31E-02	2.18E-03	4.77E-03	2.00E-02	ND	5.96E-05	8.89E-05	6.20E-07	1.42E-04	-2.24E-03								
ADP-minerals & metals ⁴⁾	kg Sbe	2.19E-04	1.67E-06	2.95E-06	2.24E-04	ND	1.56E-09	4.44E-08	3.15E-10	2.53E-08	-1.45E-06								
ADP-fossil resources	MJ	7.67E+01	6.63E+00	1.56E+01	9.89E+01	ND	5.70E-02	1.97E-01	5.01E-04	2.12E-01	-4.53E+00								
Water use ⁵⁾	m ³ e depr.	6.29E-01	3.02E-02	6.78E-01	1.34E+00	ND	1.42E-04	9.48E-04	7.78E-05	7.77E-03	-1.65E-01								

1) GWP = Global Warming Potential; 2) EP = Eutrophication potential. Required characterisation method and data are in kg P-eq. Multiply by 3,07 to get PO4e; 3) POCP = Photochemical ozone formation; 4) ADP = Abiotic depletion potential;

5) EN 15804+A2 disclaimer for Abiotic depletion and Water use and optional indicators except Particulate matter and Ionizing radiation, human health. The results of these environmental impact indicators shall be used with care as the uncertainties on these results are high or as there is limited experience with the indicator.

追加(オプション)の環境影響指標 - ADDITIONAL (OPTIONAL) ENVIRONMENTAL IMPACT INDICATORS – EN 15804+A2, EF 3.1

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Particulate matter	Incidence	1.52E-07	2.85E-08	7.59E-08	2.56E-07	ND	1.12E-09	1.33E-09	6.16E-12	1.71E-09	-4.92E-08								
Ionizing radiation ⁶⁾	kBq U235e	1.20E-01	5.57E-03	4.84E-02	1.73E-01	ND	2.52E-05	1.68E-04	9.54E-07	2.29E-04	-1.31E-02								
Ecotoxicity (freshwater)	CTUe	7.52E+00	1.17E+00	5.93E+00	1.46E+01	ND	3.14E-03	3.11E-02	8.35E-04	2.55E+00	-2.10E+00								
Human toxicity, cancer	CTUh	2.22E-09	8.10E-11	2.60E-09	4.90E-09	ND	4.48E-13	3.39E-12	1.53E-13	1.42E-11	-1.95E-09								
Human tox. non-cancer	CTUh	1.01E-07	3.76E-09	9.48E-09	1.14E-07	ND	7.09E-12	1.36E-10	5.01E-12	2.05E-09	-3.20E-09								
SQP ⁷⁾	-	5.05E+00	3.02E+00	2.33E+02	2.41E+02	ND	3.99E-03	1.48E-01	4.73E-04	4.32E-01	-1.85E+02								

6) EN 15804+A2 disclaimer for Ionizing radiation, human health. This impact category deals mainly with the eventual impact of low dose ionizing radiation on human health of the nuclear fuel cycle. It does not consider effects due to possible nuclear accidents, occupational exposure nor due to radioactive waste disposal in underground facilities. Potential ionizing radiation from the soil, from radon and from some construction materials is also not measured by this indicator; 7) SQP = Land use related impacts/soil quality.

天然資源の利用 - USE OF NATURAL RESOURCES

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Renew. PER as energy ⁸⁾	MJ	3.99E+00	9.94E-02	1.45E+01	1.86E+01	ND	3.61E-04	2.80E-03	2.87E-05	-3.54E+00	-1.27E+01								
Renew. PER as material	MJ	0.00E+00	0.00E+00	1.58E+01	1.58E+01	ND	0.00E+00	0.00E+00	1.27E+01	3.17E+00	1.27E+01								
Total use of renew. PER	MJ	3.99E+00	9.94E-02	3.03E+01	3.44E+01	ND	3.61E-04	2.80E-03	1.27E+01	6.71E+00	2.53E+01								
Non-re. PER as energy	MJ	7.40E+01	6.63E+00	5.30E+00	8.59E+01	ND	5.70E-02	1.97E-01	-5.61E-02	-2.63E+01	3.69E+00								
Non-re. PER as material	MJ	2.74E+00	0.00E+00	1.11E+00	3.85E+00	ND	0.00E+00	0.00E+00	-8.97E-01	-2.96E+00	-8.37E-01								
Total use of non-re. PER	MJ	7.67E+01	6.63E+00	6.42E+00	8.98E+01	ND	5.70E-02	1.97E-01	-9.53E-01	-2.93E+01	4.53E+00								
Secondary materials	kg	6.11E-03	3.09E-03	5.06E-02	5.98E-02	ND	2.37E-05	8.80E-05	1.73E-06	1.33E-04	-3.87E-02								
Renew. secondary fuels	MJ	6.28E-05	3.59E-05	4.18E-01	4.18E-01	ND	6.19E-08	1.12E-06	1.27E-08	1.39E-06	-3.35E-01								
Non-ren. secondary fuels	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00								
Use of net fresh water	m ³	1.89E-02	8.63E-04	1.45E-02	3.43E-02	ND	3.77E-06	2.77E-05	6.75E-07	-2.66E-03	-3.57E-03								

8) PER = Primary energy resources.

廃棄・リサイクル段階 — 廃棄 - END OF LIFE – WASTE

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Hazardous waste	kg	1.43E-01	1.19E-02	7.95E-02	2.35E-01	ND	6.34E-05	3.45E-04	2.92E-05	1.69E-03	-2.89E-02								
Non-hazardous waste	kg	4.55E+00	2.26E-01	2.02E+01	2.50E+01	ND	8.64E-04	6.48E-03	1.15E-03	3.84E+00	-4.89E-01								
Radioactive waste	kg	3.34E-05	1.36E-06	1.11E-05	4.60E-05	ND	6.19E-09	4.12E-08	2.41E-10	5.63E-08	-3.20E-06								

廃棄・リサイクル段階 — 出力フロー - END OF LIFE – OUTPUT FLOWS

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Components for re-use	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	8.37E-01	0.00E+00	0.00E+00								
Materials for recycling	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	4.06E-04	0.00E+00	0.00E+00								
Materials for energy rec	kg	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	1.01E-03	0.00E+00	0.00E+00								
Exported energy	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	2.87E-02	0.00E+00	0.00E+00								
Exported energy – Electricity	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	4.32E-03	0.00E+00	0.00E+00								
Exported energy – Heat	MJ	0.00E+00	0.00E+00	0.00E+00	0.00E+00	ND	0.00E+00	0.00E+00	2.43E-02	0.00E+00	0.00E+00								

環境影響 - ENVIRONMENTAL IMPACTS – EN 15804+A1, CML

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
Global Warming Pot.	kg CO ₂ e	5.24E+00	4.83E-01	9.89E-01	6.71E+00	ND	4.33E-03	1.38E-02	3.15E-03	6.88E-02	-3.29E-01								
Ozone depletion Pot.	kg CFC-11e	7.27E-08	5.57E-09	2.13E-08	9.96E-08	ND	5.28E-11	1.61E-10	4.81E-13	2.00E-10	-3.20E-09								
Acidification	kg SO ₂ e	1.54E-02	1.71E-03	4.22E-03	2.13E-02	ND	2.76E-05	4.67E-05	3.70E-07	6.94E-05	-1.66E-03								
Eutrophication	kg PO ₄ ³⁻ e	4.10E-03	2.86E-04	1.18E-02	1.62E-02	ND	6.46E-06	1.15E-05	1.21E-07	8.64E-05	-8.99E-03								
POCP ("smog")	kg C ₂ H ₄ e	9.85E-04	1.21E-04	3.87E-04	1.49E-03	ND	2.07E-06	3.88E-06	3.20E-08	1.50E-05	-1.91E-04								
ADP-elements	kg Sbe	2.19E-04	1.62E-06	2.77E-06	2.23E-04	ND	1.52E-09	4.33E-08	2.96E-10	2.37E-08	-1.43E-06								
ADP-fossil	MJ	7.00E+01	6.54E+00	1.49E+01	9.15E+01	ND	5.66E-02	1.95E-01	4.85E-04	2.09E-01	-4.32E+00								

環境影響 - ENVIRONMENTAL IMPACTS – GWP-GHG

Impact category	Unit	A1	A2	A3	A1-A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
GWP-GHG ⁹⁾	kg CO ₂ e	5.26E+00	4.86E-01	9.49E-01	6.70E+00	ND	4.36E-03	1.39E-02	3.15E-03	7.17E-02	-3.29E-01								

9) This indicator includes all greenhouse gases excluding biogenic carbon dioxide uptake and emissions and biogenic carbon stored in the product. In addition, the characterisation factors for the flows – CH₄ fossil, CH₄ biogenic and Dinitrogen monoxide – were updated in line with the guidance. This indicator is identical to the GWP-total of EN 15804:2012+A2:2019 except that the characterisation factor for biogenic CO₂ is set to zero.

シナリオドキュメント- SCENARIO DOCUMENTATION

製造エネルギーのシナリオドキュメント- Manufacturing energy scenario documentation

Scenario parameter	Value
Electricity data source and quality	Market for electricity, medium voltage, Japan, Ecoinvent
Electricity CO ₂ e / kWh	0.68 kg CO ₂ e / kWh
District heating data source and quality	-
District heating CO ₂ e / kWh	-

廃棄・リサイクル段階のシナリオドキュメント-End of life scenario documentation

Scenario information	Value
Collection process – kg collected separately	1.778
Collection process – kg collected with mixed waste	-
Recovery process – kg for re-use	0.837
Recovery process – kg for recycling	0.0004
Recovery process – kg for energy recovery	0.001
Disposal (total) – kg for final deposition	0.939
Scenario assumptions e.g. transportation	Transported 50 km by lorry

検証報告 - THIRD-PARTY VERIFICATION STATEMENT

EPD Hub declares that this EPD is verified in accordance with ISO 14025 by an independent, third-party verifier. The project report on the Life Cycle Assessment and the report(s) on features of environmental relevance are filed at EPD Hub. EPD Hub PCR and ECO Platform verification checklist are used.

EPD Hub is not able to identify any unjustified deviations from the PCR and EN 15804+A2 in the Environmental Product Declaration and its project report.

EPD Hub maintains its independence as a third-party body; it was not involved in the execution of the LCA or in the development of the declaration and has no conflicts of interest regarding this verification.

The company-specific data and upstream and downstream data have been examined as regards plausibility and consistency. The publisher is responsible for ensuring the factual integrity and legal compliance of this declaration.

The software used in creation of this LCA and EPD is verified by EPD Hub to conform to the procedural and methodological requirements outlined in ISO 14025:2010, ISO 14040/14044, EN 15804+A2, and EPD Hub Core Product Category Rules and General Program Instructions.

Verified tools

Tool verifier: Magaly Gonzalez Vazquez

Tool verification validity: 27 March 2025 - 26 March 2028

Yazan Badour as an authorized verifier for EPD Hub Limited 22.01.2026

